Signal SPD Series Surge protector for HD SDI Camera BNC/connector 5KA 12V





Description

3 in 1 monitor lightning arrester(power and control), a Kind of SPD, designed for camera power, video, control line from lightning electromagnetic pulse, induced over-voltage, operating over -voltage.

Features

- Multi. Protection circuits, Gas-Tube+ TVS technology
- Dual protection in Common module and different module
- •3 in 1 protection
- TVS array technology, low capacitance
- Multi-Strike Capability

Application

- Designed to protect monitor equipments (power, Date control, Video), widely applied in bank monitor & safe guard system.
- •Monitor equipment for school, enterprise, road etc. security and protection.


Specification

Model	M10-12/D12BM/D12Y2	M10-24/D12BM/D12Y2	M10-220/D12BM/D12Y2
Lightning projection zone(LPZ)		2	
Standards Compliance	IEC61643-1, EN60950,GB/T18802.21-2002,TB/T2311-2002, YD/T1235.2		



According to IEC61643		III	
According to DIN VDE6075 Part6(Draft 11.89) A1,A2	D		
Max continuous operating voltage Uc	12VDC		
Nominal discharge current (8/20µs) In	ЗКА		
Max discharge current Imax (8/21μs) Imax		5KA	
Transmission rate	Video:100Mbps Clamped type:10Mbps		
Limiting Voltage(10/700µs)component wire-Enclosure		40V	
Nominal working voltage(Un)	12V	24V	220V
Max continuous operation voltage(Uc)	15V	30V	275V
Nominal discharge current Imax(8/20μs)		5kA	
Max discharge current Imax(8/20μs)	10kA		
Load current		0.5A	
Protection level Up (In)	60V	100V	900V
Response time (Ta)		1ns	
Mounting	Be Installed between protected equipment and signal line		
Working conditions	Clamped type		
Dimension	122*80*30mm		
Interface form	BNC(J,K acccording to the actual needs of the configuration) Video:BNC,PTZ control Clamped type		
IP code(IEC EN 60529)	IP20		
Error rate	≤10 ⁻¹²		
Material/color	Aluminum/Blue		
Insertion loss	≤.0.5dB		
Working conditions	Temperature: -40 to 85 °C , Relative humidity: ≤95 %		

Installation And Wiring Diagram of M10-24/D12BM/D12Y2 SPD

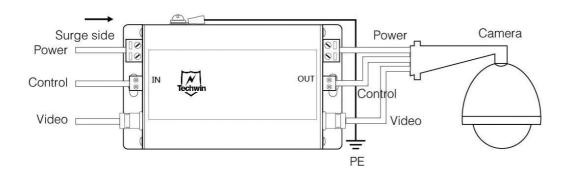

M10-24/D12BM/D12Y2